

C-TRONIC

cutter bowl cutter

- Robusta struttura in alluminio pressofuso ed estruso.
- Motore e vasca affiancati che permettono di isolare dal calore il prodotto lavorato.
- Vasche in acciaio inox con fondo termico e manici.
- Motori ventilati ad alto rendimento per uso continuo.
- Robusti coltelli a lame curve in acciaio temprato da coltelleria.
- Microinterruttore di sicurezza su coperchio.
- Microinterruttore su leva.
- Coperchio in Tritan trasparente che permette ottima visibilità durante la lavorazione.
- Foro di aggiunta ingredienti su coperchio.
- Variatore continuo di velocità di serie.
- In dotazione: spatola e piastra affilatura lame.

- *Sturdy body in die-cast and extruded aluminium.*
- *Motor and tank side-by-side, allowing the product to be isolated from the heat.*
- *S/S bowl with handles and heavy bottom.*
- *High efficiency ventilated motor for continuous operation*
- *Strong cutlery steel knives.*
- *Safety micro-switch on lid.*
- *Micro-switch on lever.*
- *Lid in transparent Tritan allowing excellent visibility during processing.*
- *Lid with opening to add ingredients during operation.*
- *Standard speed control*
- *Standard: spatula and sharpening stones.*



C-TRONIC 9 PLUS

Versione:

- **Variotronic:** variatore di velocità stabilizzato.
- **C-Tronic 9 Plus:**
 - Potente motore asincrono con inverter per un controllo della potenza a tutti i regimi di giri.
 - Velocità di lavorazione fino a 3.500 g/m.
 - Mozzo coltelli in acciaio inox.
 - Spatola raschiatrice per la pulizia di vasca e coperchio durante la lavorazione.

Opzionali:

- Mozzo con lame dentate.
- Mozzo con lame forate.
- Mozzo per pesto.
- Mozzo per impasti.
- Spatola raschiatrice per la pulizia di vasca e coperchio durante la lavorazione.

Version:

- **Variotronic:** stabilised speed variator.
- **C-Tronic 9 Plus:**
 - Asynchronous motor with inverter for adjusting the power at all speeds.
 - Processing speed up to 3,500 g / m.
 - Knife hub in stainless steel.
 - Scraper spatula for cleaning the tank and lid during processing.

Options:

- Hub with toothed blades.
- Hub with holed blades.
- Hub for pesto.
- Hub for dough mixes.
- Scraper spatula for cleaning the tank and lid during processing.



C-TRONIC 4 VT



Comandi
Controls

VARIOTRONIC™
SYSTEM


Variotronic: variatore di velocità stabilizzato.
Variotronic: stabilised speed variator.



Spatola raschiatrice per la pulizia di vasca e coperchio durante la lavorazione
Scraper spatula for cleaning the tank and lid during processing



C-TRONIC 6 VT

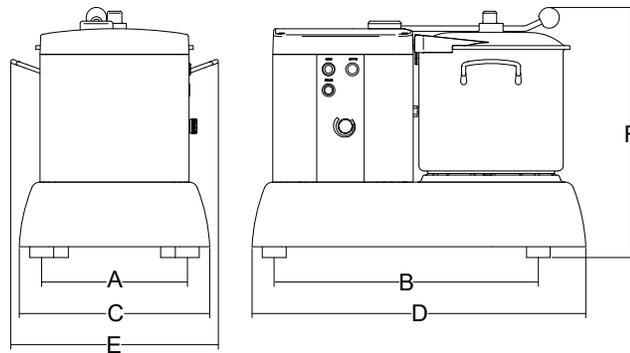

	watt/HP	ph	lt	lt	r.p.m.	mm	mm	mm	mm	mm	mm	kg	mm	kg
C-Tronic 4 VT	350/0,5	1ph	3,3	1,5	600÷2800	185	369	251	457	296	300	-	-	-
C-Tronic 6 VT	350/0,5	1ph	5,3	3,1	600÷2800	185	369	251	457	304	362	-	-	-
C-Tronic 9 VT	350 + 350 0,5 + 0,5	1ph	9,4	5,4	600÷2800	244	443	319	560	348	420	-	-	-
C-Tronic 9 Plus	1.100/1,5	1ph	9,4	5,4	600÷3500	244	443	319	560	348	420	-	-	-