



SOFTCOOKER S

Cottura a bassa temperatura
low temperature cooking

Apparecchio per la cottura a bassa temperatura con riscaldamento statico dell'acqua,

- Struttura in acciaio inox, vasca di cottura gastronorm in acciaio inox.
- Pratiche maniglie per il trasporto della vasca.
- Potenti resistenze corazzate a contatto del fondo della vasca.
- Sistema elettronico di controllo della temperatura con visualizzazione della temperatura e del tempo di esercizio.
- Stesso sistema di controllo del Softcooker con ΔT di 0,2°C;
- 5 programmi memorizzabili,
- Temperatura selezionabile in °C e °F.
- Coperchio vasca fornito di serie,
- Versione R con rubinetto per lo scarico dell'acqua.



Low temperature cooking device with water static heating.

- *Stainless steel structure and 1/1 GN made of stainless steel*
- *Practical handles to carry it easily*
- *Powerful shock-proof coated heating elements in contact with tank bottom*
- *Electronic control system of the temperature with working temperature display*
- *Same control system of Softcooker with ΔT of 0,2°C;*
- *5 storabile programs*
- *Temperature setting in °C and °F.*
- *Equipped with lid*
- *R versione with tap for discharging water.*

SOFTCOOKER S 1/1 GN



SOFTCOOKER S 2/3 GN



SOFTCOOKER S 2/3 GN




SOFTCOOKER S 1/1 GN



SOFTCOOKER SR 2/3 GN

SOFTCOOKER SR 1/1 GN

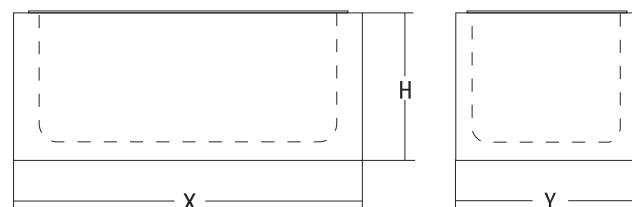

| | watt | | °C | lt | lt | mm | mm | mm | kg | mm | mm | kg |
|----------------------|-------|-----|---------|------|----|-----|-----|-----|------|-------------|----|----|
| Softcooker S 1/1 GN | 1.700 | 1ph | 24 ÷ 99 | 26,5 | 22 | 565 | 360 | 300 | 16 | 600x500x420 | 20 | |
| Softcooker S 2/3 GN | 1.150 | 1ph | 24 ÷ 99 | 16,5 | 14 | 390 | 360 | 300 | 5 | 600x500x420 | 9 | |
| Softcooker SR 1/1 GN | 1.700 | 1ph | 24 ÷ 99 | 29 | 25 | 575 | 370 | 300 | 16,5 | 600x500x420 | 20 | |
| Softcooker SR 2/3 GN | 1.150 | 1ph | 24 ÷ 99 | 19 | 17 | 400 | 370 | 300 | 5,5 | 600x500x420 | 9 | |



SOFTCOOKER SR 2/3 GN

SOFTCOOKER SR 1/1 GN